




D8



ITEM CODE	WATTAGE	COLOR TEMP	SIZE (MM)	LED LM
302220	20W	2700K	1000 X 30 X 30	1600LM/M
302320	20W	3000K	1000 X 30 X 30	1700LM/M
302420	20W	4000K	1000 X 30 X 30	1800LM/M

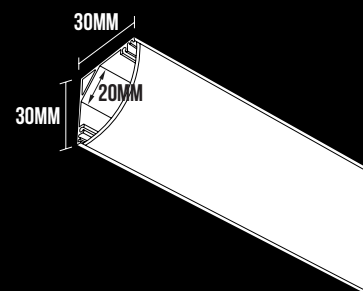

Materials

Extruded aluminium profiles with high quality durable UV stabilized diffuser.




Applications

Cove lighting, cabinet lighting, display lighting, joinery lighting accent lighting and indirect lighting.

Options

- **Dimming:** DALI and DSI dimming 1-10V dimming
- **CRI 95+**
- **Color Temperatures :** 2700K, 3000K, 4000K, 5000K and 6000K
- **Individual luminaire or continuous runs**
- **Customised wattages**
- **RGB LED boards**
- **Emergency modules**

Accessories



Features:

- A slim directional profile height of 30mm.
- Directional angle ideal for indirect lighting, controlled and optimum illumination on objects.
- High quality extruded aluminium profiles.
- Frosted lens for uniform and smooth illumination.
- Dot free, continuous homogeneous lighting effect.
- 50mm incremental length continuous runs.
- Remote 24V driver, single driver for multiple lengths, cost effective solution.
- Life: 50,000 hours L90/B10.
- Easy to install with mounting brackets.