


DLA Night

Litenet presents S Lite Kinetix, which offers a range of down lights that are designed for commercial hospitality education, age care or health industry lighting applications. The DLA Night collection of fixed and adjustable down lights are low profiled and are available in satin white or matte black powder coat finish. The low glare anti reflective reflectors are able to create mood accent lighting. This range of down lights offer a wide range of optics and the interchangeable reflectors, different reflectors are used to accommodate mood lighting. As a standard, this range comes with CREE COB chip with CRI80 upon request CRI90 can be made available.

The DLE Night A collection is designed with a stable heat sink with a high-grade aluminum to maximise heat dissipation which will intern maximise the life of the LED chip. The DLE Night range of down lights are available with fixed or adjustable options, this range of down lights have deep conical housing minimise uncomfortable glare, combined with the dark light reflector presents a unparalleled visual comfort to the eye and style to your design.

Non-dimmable ECG standard, Phase Dim/DALI is optional.
50,000 hour life 5 with year warranty L70

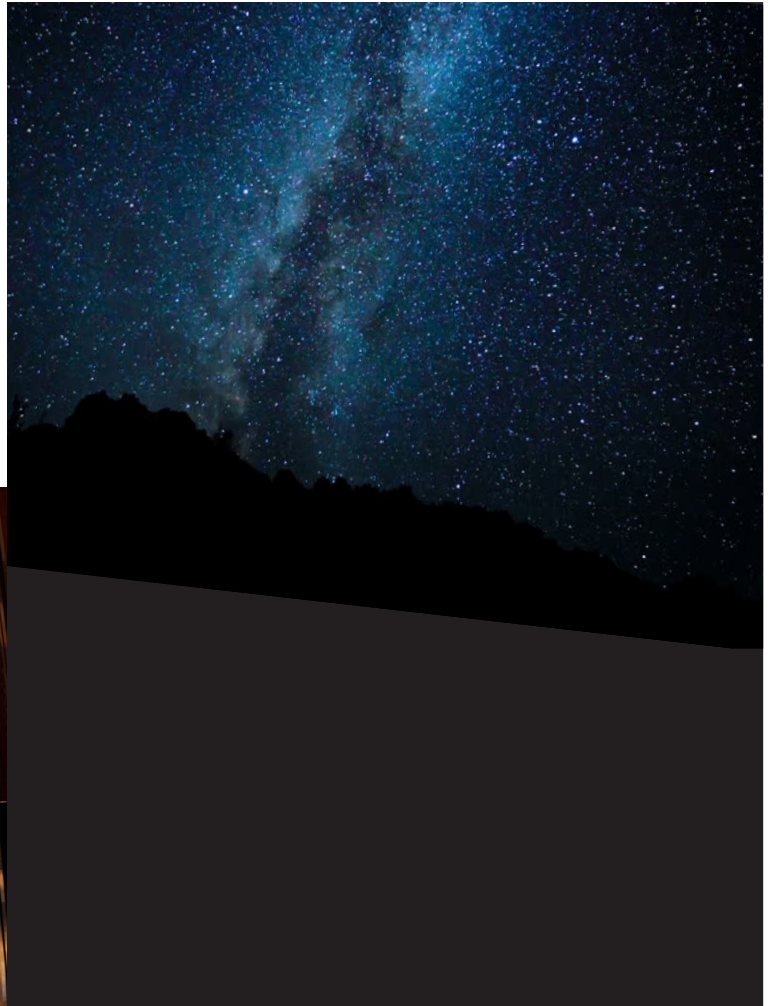

-
-
-
-
-
-
-
-
-
-
-
-



DL E A88



DL A 103



DL A 115



DL A 140



DL A 55



DL A 90




DL A 130



DL A 145


DLA 88

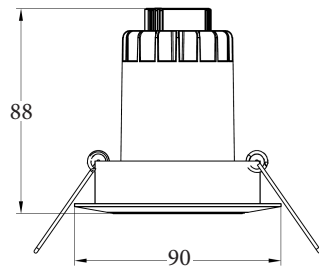

	CITIZEN COB	3000K / 4000K
	DC25V -DC42V	250mA
	10-10V, DALI	
	80mm	
	30° TIR	

Power	10W
LED	COB
Luminous flux 3K	825lm
Luminous flux 4K	946lm
Dimensions	78mm x 88mm
Cut Out	70mm
Beam angles	15°, 24°, 30°, 36°
CRI	80
3000K Part No	DLA 88 10803
4000K Part No	DLA 88 10804


DLA 103



	CITIZEN COB	3000K / 4000K
	DC25V -DC42V	350mA / 450mA
	10-10V, DALI	
	110mm	
	30° TIR	

Power	15W	20W
LED	COB	COB
Luminous flux 3K	11392lm	1858lm
Luminous flux 4K	1575lm	2100lm
Dimensions	120mm x 103mm	120mm x 103mm
Cut Out	110mm	110mm
Beam angles	15°, 24°, 30°, 36°, 60°	15°, 24°, 30°, 36°, 60°
CRI	80	80
3000K Part No	DLA 103 15803	DLA 103 20803
4000K Part No	DLA 103 15804	DLA 103 20804


DLA 115



	CITIZEN COB	3000K / 4000K
	DC25V -DC42V	600mA / 700mA
	10-10V, DALI	
	110mm	
	30° Tilt	

Power	25W	30W
LED	COB	COB
Luminous flux 3K	2323lm	2787lm
Luminous flux 4K	2625lm	3150lm
Dimensions	110mm x 116mm	110mm x 116mm
Cut Out	100mm	100mm
Beam angles	15°, 24°, 30°, 36°, 60°	15°, 24°, 30°, 36°, 60°
CRI	80	80
3000K Part No	DLA 115 25803	DLA 115 30803
4000K Part No	DLA 115 25804	DLA 115 30804


DLA 140



	CITIZEN COB	3000K / 4000K
	DC25V -DC42V	1000mA
	10-10V, DALI	
	110mm	
	30° Tilt	

Power	40W
LED	COB
Luminous flux 3K	3716lm
Luminous flux 4K	4200lm
Dimensions	110mm x 116mm
Cut Out	100mm
Beam angles	15°, 24°, 30°, 36°, 60°
CRI	80
3000K Part No	DLA 140 25803
4000K Part No	DLA 140 25804


DLA 55



	CITIZEN COB	3000K / 4000K
	DC25V -DC42V	250mA
	10-10V, DALI	
	55mm	

Power	10W
LED	COB
Luminous flux 3K	825lm
Luminous flux 4K	946lm
Dimensions	78mm x 88mm
Cut Out	55mm
Beam angles	15°, 24°, 30°, 36°
CRI	80
3000K Part No	DLA 55 10803
4000K Part No	DLA 55 10804


DLA 90



	CITIZEN COB	3000K / 4000K
	DC25V -DC42V	350mA / 450mA
	10-10V, DALI	
	90mm	

Power	15W	20W
LED	COB	COB
Luminous flux 3K	11392lm	1858lm
Luminous flux 4K	1575lm	2100lm
Dimensions	120mm x 103mm	120mm x 103mm
Cut Out	90mm	90mm
Beam angles	15°, 24°, 30°, 36°, 60°	15°, 24°, 30°, 36°, 60°
CRI	80	80
3000K Part No	DLA 90 15803	DLA 90 20803
4000K Part No	DLA 90 15804	DLA 90 20804


DLA 130



	CITIZEN COB	3000K / 4000K
	DC25V -DC42V	600mA / 700mA
	10-10V, DALI	
	130mm	

Power	25W	30W
LED	COB	COB
Luminous flux 3K	2323lm	2787lm
Luminous flux 4K	2625lm	3150lm
Dimensions	110mm x 116mm	110mm x 116mm
Cut Out	130mm	130mm
Beam angles	15°, 24°, 30°, 36°, 60°	15°, 24°, 30°, 36°, 60°
CRI	80	80
3000K Part No	DLA 130 25803	DLA 116 30803
4000K Part No	DLA 130 25804	DLA 116 30804

DLA 145



	CITIZEN COB	3000K / 4000K
	DC25V -DC42V	1000mA
	10-10V, DALI	
	145mm	

Power	40W
LED	COB
Luminous flux 3K	3716lm
Luminous flux 4K	4200lm
Dimensions	110mm x 116mm
Cut Out	130mm
Beam angles	15°, 24°, 30°, 36°, 60°
CRI	80
3000K Part No	DLA 145 25803
4000K Part No	DLA 145 25804