



FLOW 125

FLOW 170




FLOW

LITENET presents a beautifully designed recessed mounted adjustable light fitting for commercial applications. The Flow range of recessed mounted down lights are designed to create a living experience. To maximise heat dissipation the Flow is constructed with premium grade aluminium. This Recessed mounted down light is created a deep set aluminium reflector for a spot light effect. This down light is powder coated in white finish.

The S Lite Kinetix is an architectural range of fittings which is designed and constructed to suit the indoor environment which accentuates comfort and low glare. The Flow is available in Black or white finish.

Non-dimmable driver is standard DALI dim is available

50,000-hour 5-year warranty

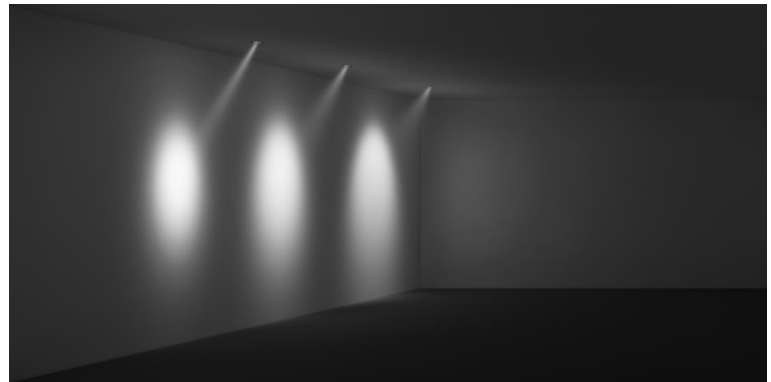

FLOW 125

FLOW 170

	15W	20W	25W	30W	40W
Power	15W	20W	25W	30W	40W
LED	COB	COB	COB	COB	COB
Output current	350mA	450mA	550mA	350mA	450mA
CCT	3000K / 4000K	3000K / 4000K	3000K / 4000K	3000K / 4000K	3000K / 4000K
Luminous flux	1120lm / 1232lm	1520lm / 1672lm	1920lm / 2112lm	2320lm / 2552lm	3120lm / 3432lm
Dimensions (D x H)mm	140xx115mm	140xx115mm	140xx115mm	190X160MM	190X160MM
Cut Out	125MM	125MM	125MM	170MM	170MM
Beam angle	15°, 25°, 38°, 60°	15°, 25°, 38°, 60°	15°, 25°, 38°, 60°	15°, 25°, 38°, 60°	15°, 25°, 38°, 60°
CRI	80	80	80	80	80
Part No 3000K	FLOW 125 15-CW-83	FLOW 125 20-CW-83	FLOW 125 25-CW-83	FLOW 170 30-CW-83	FLOW 170 40-CW-83
Part No 4000K	FLOW 125 15-CW-84	FLOW 125 20-CW-84	FLOW 125 25-CW-84	FLOW 170 30-CW-84	FLOW 170 40-CW-84