



ICON 150R



ICON


LITENET presents a beautifully designed surface mounted round light fitting for indoor commercial lighting applications. The ICON 150R is a surface mounted down light designed to create a living experience. To maximise heat dissipation the ICON is constructed with premium grade aluminium. This surface mounted down light is created with anti glare properties including a deep set aluminium reflector and dark light reflector. This surface mounted down light is powder coated in Black or white finish.

The S Lite Kinetix is an architectural range of fittings which is designed and constructed to suit the indoor environment which accentuates comfort and low glare.

Non-dimmable driver is standard DALI dim is available

50,000-hour 5-year warranty

	CREE COB	3000K / 4000K
	DC25V -DC42V	500mA - 1000mA
	10-10V, DALI	

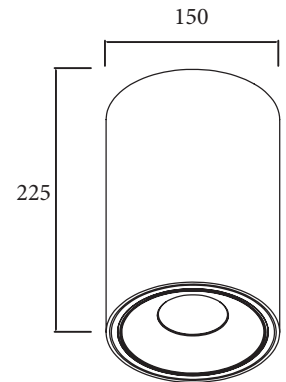

Power	20W	30W	40W	50W
LED	COB	COB	COB	COB
Output current	500mA	700mA	800mA	1000mA
CCT	3000K / 4000K	3000K/4000K	3000K / 4000K	3000K / 4000K
Luminous flux	1681lm / 1900lm	2522lm / 2850lm	3362lm / 3800lm	4203lm / 4750lm
Dimensions (D x H)mm	200mm x 139mm	200mm x 139mm	200mm x 139mm	200mm x 139mm
Beam angle	24°, 60°, 90°	24°, 60°, 90°	24°, 60°, 90°	24°, 60°, 90°
CRI	80	80	80	
Part No 3000K	ICON 150R- 20-CW-83	ICON 150R- 30-CW-83	ICON 200R- 40-CW-83	ICON 200R- 50-CW-83
Part No 4000K	ICON 150R- 20-CW-84	ICON 150R- 30-CW-84	ICON 200R- 40-CW-84	ICON 200R- 50-CW-84