


PYRO I



Product information

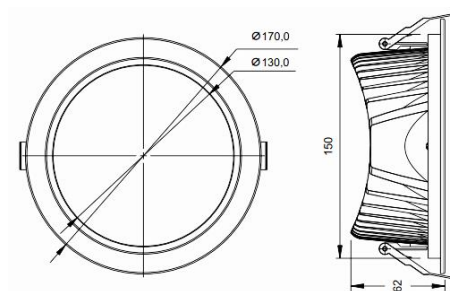

Source Type	SMD LED
Corrected Colour Temperature	Specify 3000K or 4000K
Control gear	Electronic Driver
Cut out	Ø155mm
Height	65mm
IP	IP54
Power	16W & 20W
CRI	specify 80
Beam angle	60°

Recessed LED fixed down light, designed for uniform lighting where Vertical illumination is important. This fitting is finished in satin white or matte black powder coated.

The heat sink and the trim is constructed with high grade aluminum, for better heat dissipation.

Designed with minimal trim width.

Luminous flux at 25°C

Colour Rendering Index specify >80 standard

SMD Chip with 3- Step Mac-Adam Ellipse.

Non-dimmable ECG standard, Phase Dim/DALI is optional.

50,000-hour 5 year warranty

Specification of the product

Part No.	CCT	Power (W)	Driver current (mA)	Luminous Flux (lm)
170.840.20	4000K	20	500	1900
170.840.16	4000K	16	400	1520
170.830.20	3000K	20	500	1800
170.830.16	3000K	16	400	1440