



# S80

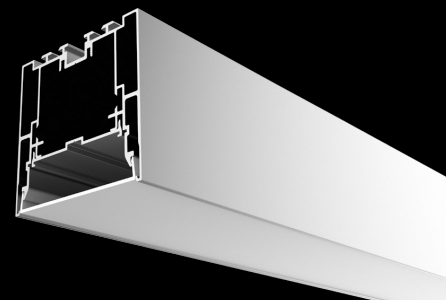

ITEM CODE	WATTAGE	COLOR TEMP	DIMMING	LED LM
801230	30W	2700K	1000 X 80 X 77	2490LM/M
801330	30W	3000K	1000 X 80 X 77	2550LM/M
801430	30W	4000K	1000 X 80 X 77	2600LM/M

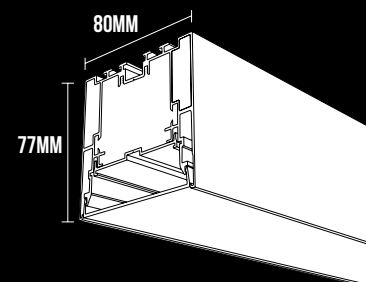

## Materials

Extruded aluminium profiles with high quality durable UV stabilized diffuser.



## Applications

Offices, hospitality, schools, hospitals, malls, accent lighting, retails, large indoor open areas.

## Options

- **Dimming:** DALI and DSI dimming  
1-10V dimming
- **CRI 95+**
- **Color Temperatures :** 2700K, 3000K, 4000K, 5000K and 6000K
- **Individual luminaire or continuous runs**
- **Customised wattages for up/down lighting**
- **RGB LED boards**
- **Emergency modules**
- **Bends:**



## Features:

Sleek modern design aluminium profile with 80mm of width.

Versatile profile suitable for all applications, i.e. recessed, surface mount and suspended.

Choice of up and down profile for direct and indirect lighting.

Provides continuous, dot-free homogeneous light output.

Superior quality components for optimum performance.

Clean-cut magnetic end-caps, no screws.

Seamless joints with speedy connectors.

Plug and play system with factory fitted components for quick installation.

High quality LED modules with CRI85.

Choice of integral or remote driver.

Incremental length 50mm.

Available with suspension wires, brackets for surface mount and trimless recessed installations.

Life: 50,000 hours L90/B10.