
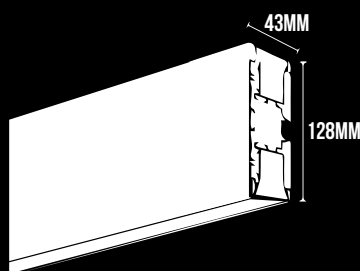


WM43

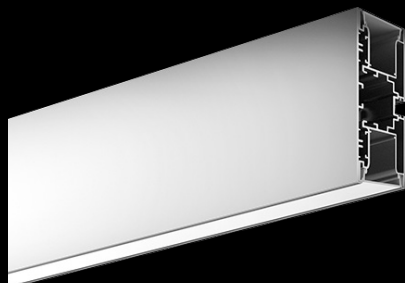

Features:

- Wall mount up/down sleek aluminium profile.
- Provides continuous, dot-free homogeneous light output.
- Superior quality components for optimum performance.
- Clean-out magnetic end-caps, no screws.
- Seamless joints with speedy connectors.
- Plug and play system with factory fitted components for quick installation.
- High quality LED modules with CRI85.
- Integral driver,
- Incremental length 50mm.
- Life: 50,000 hours L90/B10.

ITEM CODE	WATTAGE	COLOR TEMP	BEAM ANGLE	LED IM
432240	2X20W	2700K	128X43	3420LM/M
432340	2X20W	3000K	128X43	3540LM/M
432440	2X20W	4000K	128X43	3640LM/M

Materials

Extruded aluminium profiles with high quality durable UV stabilized diffuser.



Applications

Reception areas, offices, hospitality, schools, hospitals, malls, accent lighting, retails.

Options

- **Dimming:** DALI and DSI dimming
1-10V dimming
- **CRI 95+**
- **Color Temperatures :** 2700K, 3000K, 4000K, 5000K and 6000K
- **Individual luminaire or continuous runs**
- **Customised wattages**
- **RGB LED boards**
- **Emergency modules**
- **Bends:**

